

Isis

Tri Band Internal GSM PCB Antenna

Features

- ◆ Groundplane Independent
- ◆ Covers 900/1800 and 1900 MHz bands
- ◆ Various cable/connector options
- ◆ Ideal for fixed and mobile terminals

Specifications

Radiating element	1/2 Wave Element
Frequency range	900/1800 and 1900 MHz
Peak gain	1.0 dBi
Polarisation	Linear
Return loss	-7.5 dB
Power rating	10W
Cable / Connector	Various including MMCX, U.FL, SMA
Dimensions	60 x 17mm

Popular Ordering Options

FISS35063-MR-16	Isis with 160mm RG-178 and MMCX Connector
FISS35063-UF-10	Isis with 100mm cable and U.FL Connector

Specifications subject to change without notice.



5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

EAD 
embedded antenna design ltd
Delivering Antenna Innovation

Isis| Tri Band GSM Internal PCB Antenna

Return Loss

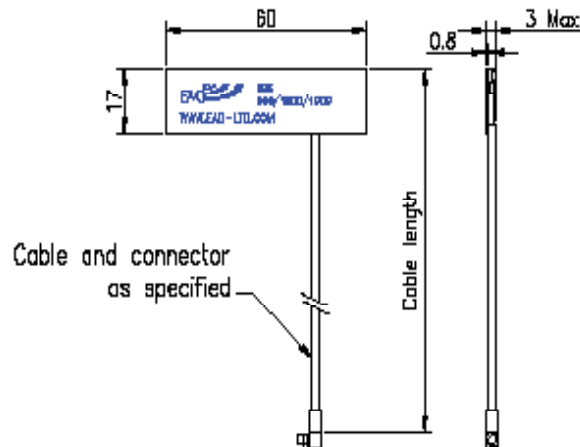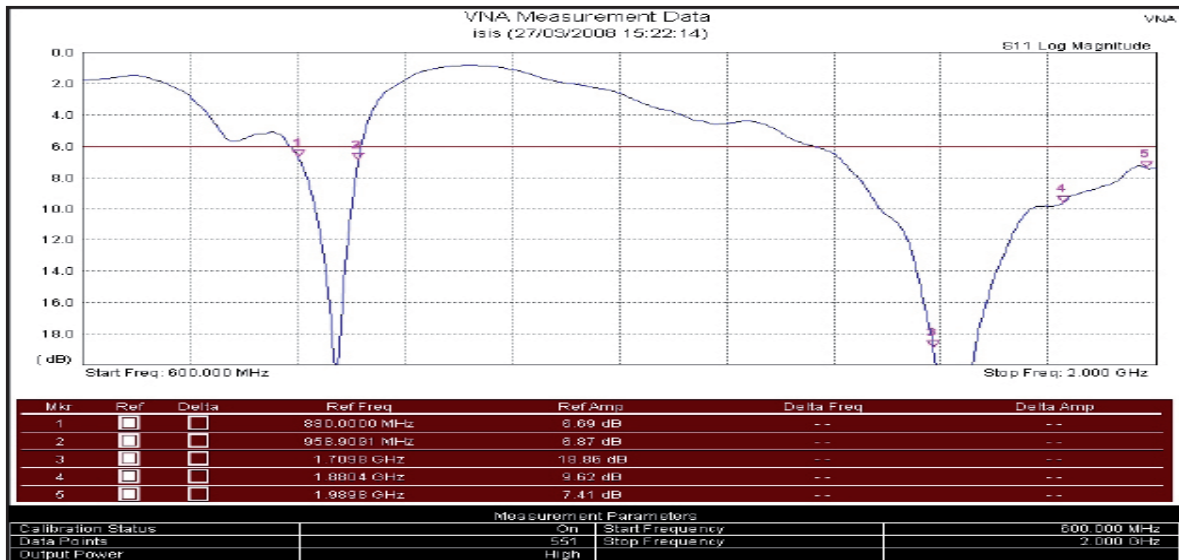

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com