

Neris

Tri Band Internal GSM PCB Antenna

Features

- ◆ Groundplane Independent
- ◆ Covers 900/1800 and 1900 MHz bands
- ◆ Various cable/connector options
- ◆ Ideal for fixed and mobile terminals

Specifications

Radiating element	1/2 Wave Element
Frequency range	900/1800 and 1900 MHz
Peak gain	1.0 dBi
Polarisation	Linear
Return loss	-8 dB
Power rating	10W
Cable / Connector	Various including MMCX, U.FL, SMA
Dimensions	81 x 21mm


Popular Ordering Options

FNER35001-MR-16	Neris with 160mm RG-178 and MMCX Connector
FNER35001-UF-10	Neris with 100mm cable and U.FL Connector

Specifications subject to change without notice.



5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

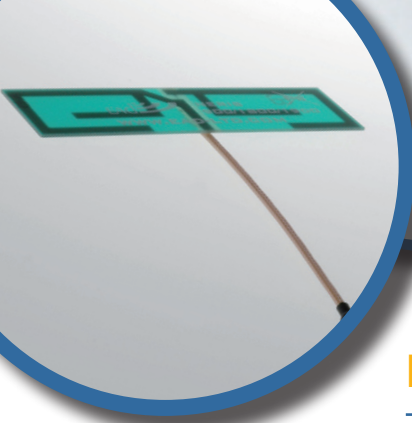

Neris| Tri Band GSM Internal PCB Antenna

Return Loss

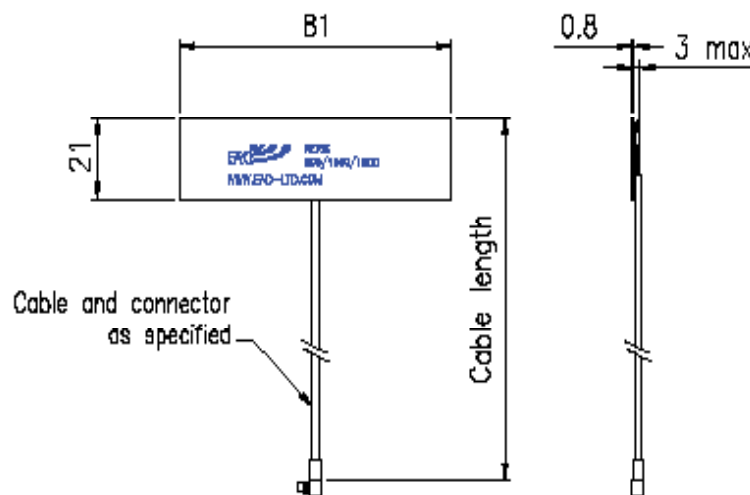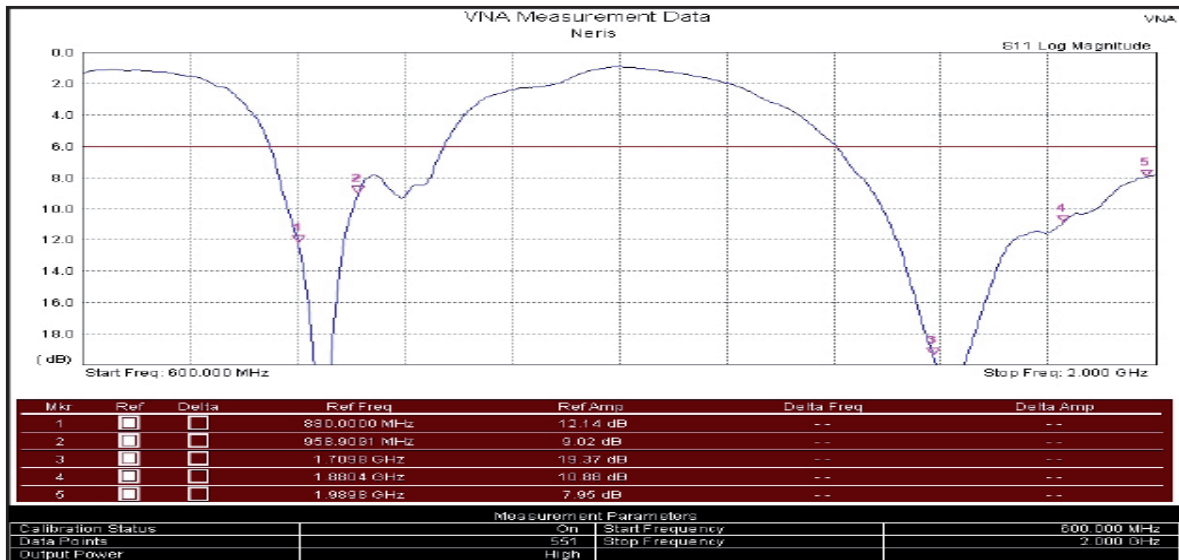

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com