

S-Blade Pentaband

PentaBand Waterproof Blade Antenna

Features

- ◆ Groundplane Independent
- ◆ Covers 850/900/1800/1900/2100 MHz bands
- ◆ Various cable/connector options
- ◆ Waterproof Cover provides durability

Specifications

Radiating element	1/2 Wave Element
Frequency range	850/900/1800/1900/2100 MHz
Peak gain	1.5 dBi
Polarisation	Linear
Return loss	-8 dB
Power rating	10W
Cable / Connector	Various including MMCX, FME, SMA
Dimensions	120 x 23mm

Popular Ordering Options

FSB35173-MR-2K	S-Blade Penta Band with 2M RG-174 and MMCX RA Connector
FSB35173-SM-2K	S-Blade Penta Band with 2M RG-174 and SMA-Male Connector
FSBA35176-MR-2K	S-Blade Penta Band w/tape with 2M RG-174 and MMCX RA Connector
FSBA35176-SM-2K	S-Blade Penta Band w/tape with 2M RG-174 and SMA-Male Connector

Specifications subject to change without notice.



5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com



S-Blade Quad | PentaBand Waterproof Blade Antenna

Return Loss

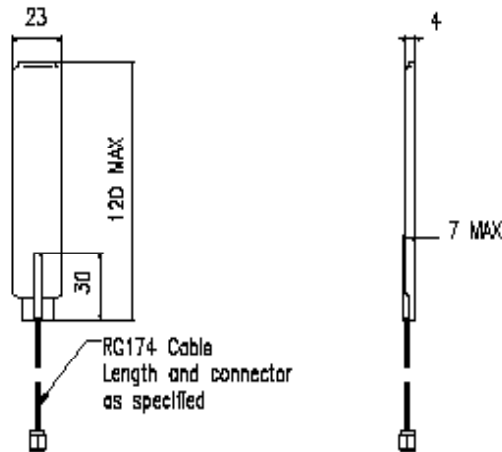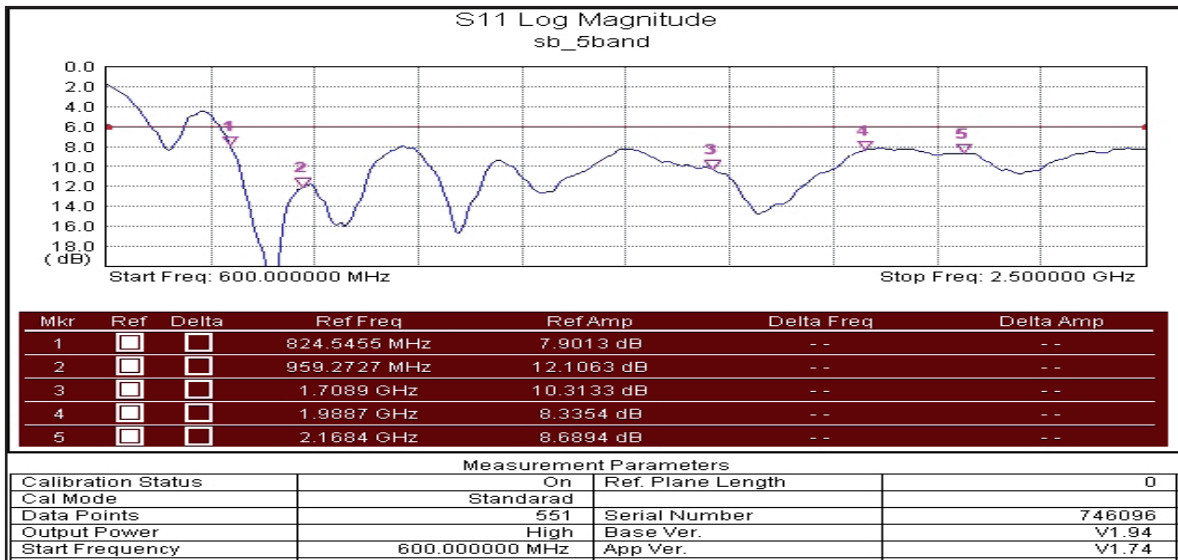

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com