

S-Blade

Tri-Band GSM Water-
proof Blade Antenna

Features

- ◆ Groundplane Independent
- ◆ Covers 900/1800/1900 MHz band
- ◆ Various cable/connector options
- ◆ Waterproof Cover provides durability

Specifications

Specifications	
Radiating element	1/2 Wave Element
Frequency range	900/1800/2100 MHz
Peak gain	1.5 dBi
Polarisation	Linear
Return loss	-11 dB
Power rating	10W
Cable / Connector	Various including MMCX, FME, SMA
Dimensions	120 x 23mm

Popular Ordering Options

FSB35008-MR-1K	S-Blade with 1M RG-174 and MMCX RA Connector
FSB35008-SM-1K	S-Blade with 1M RG-174 and SMA-Male Connector



Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 825044
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

S-Blade | Tri Band GSM Waterproof Blade Antenna

Return Loss

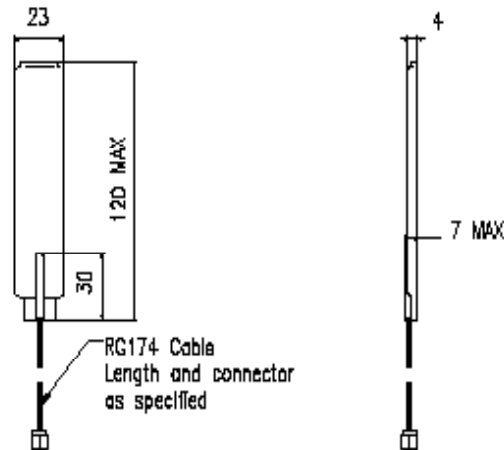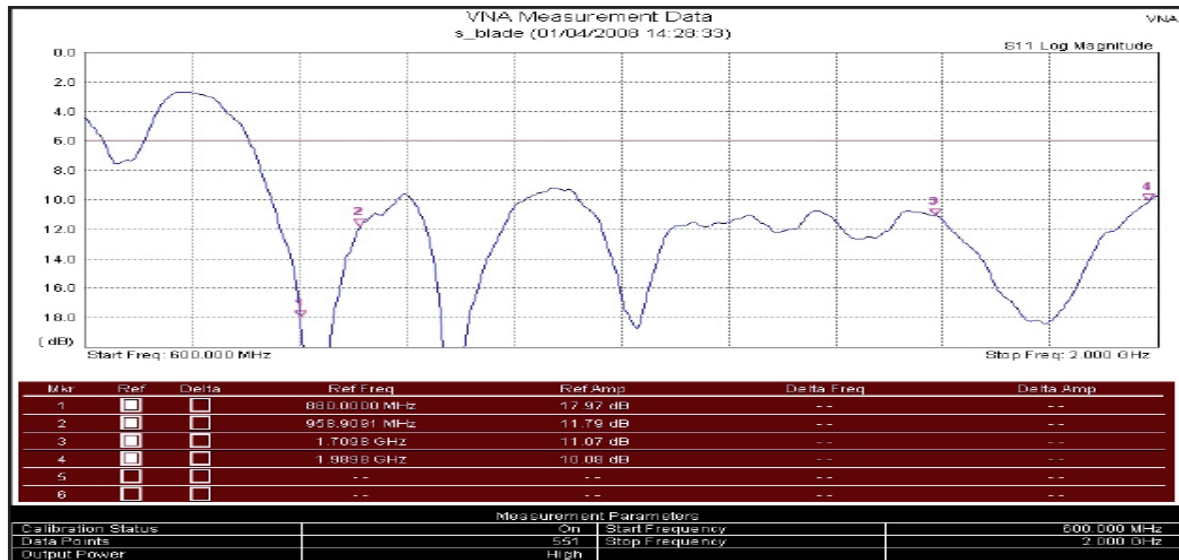

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com